



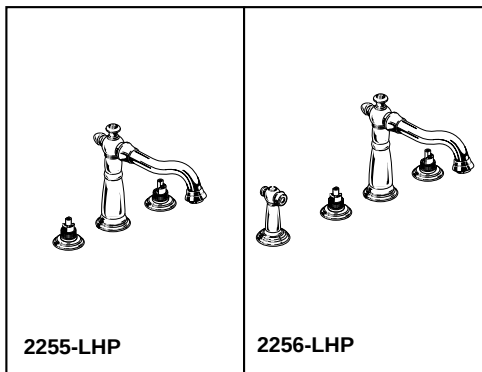


Submitted Model No.: _____

Specific Features: _____

2255-LHP Series

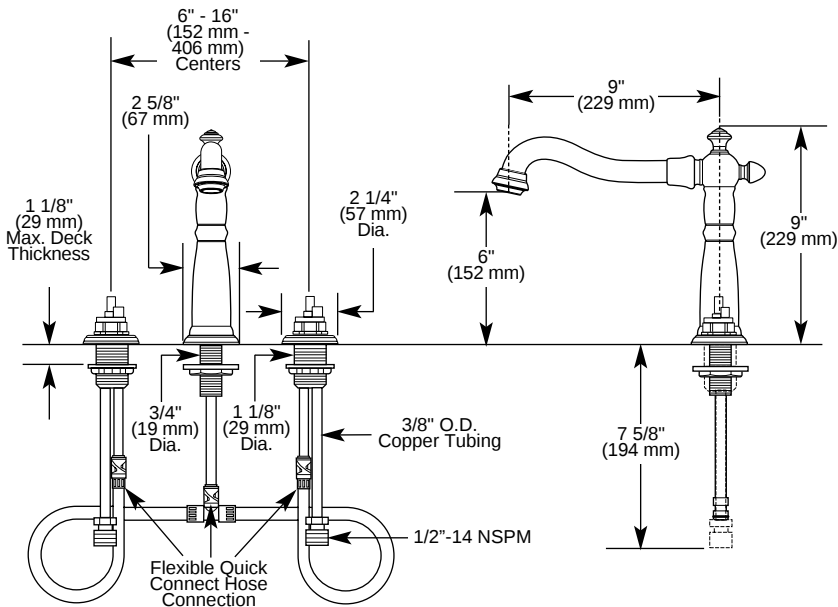

2256-LHP Series

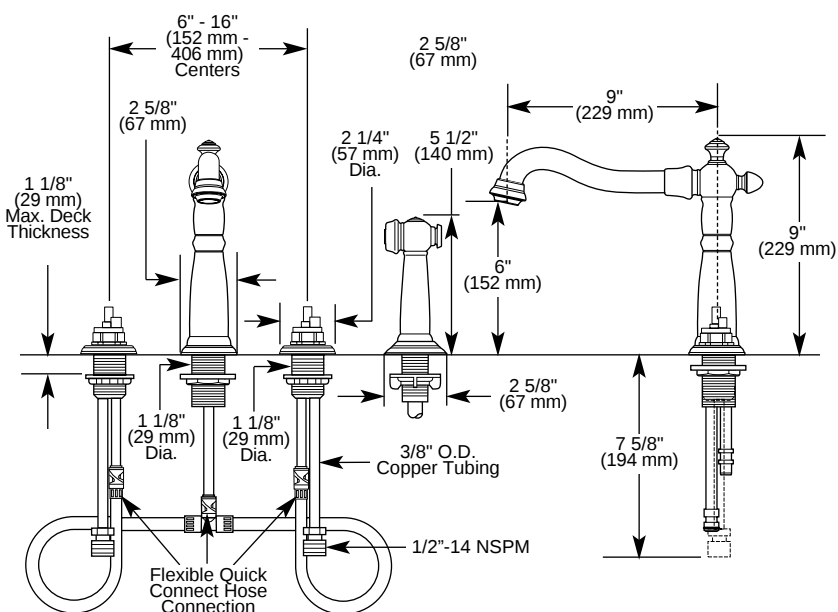

DELTA[®]

KITCHEN FAUCETS

- Victorian[®] Series
- Two Handle Widespread Deck Mount
- 3 and 4 Hole Sink Applications

STANDARD SPECIFICATIONS:


- Two handle kitchen deck faucets for exposed mounting on three and four hole sinks.
- Solid brass fabricated end valve and spout bodies.
- Widespread - 6" (152 mm) to 16" (406 mm) centers.
- 9" (229 mm) long, 9" (229 mm) overall height, 6" (152 mm) outlet height, spout swings 360°.
- Hot and cold stems are interchangeable.
- LHP - Less Handle Program.
- 1/4 turn stops.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Models 2256-LHP Series with spray attachment have anti-siphon device as integral part of valve body.
- Quick Snap[®] hose and handle base installation.
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.
- Standard mounting deck thickness 1 1/8" can be extended 1" with RP3775 thick tile mounting kit.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.


COMPLIES WITH:

- NSF 61
- ASME A112.18.1 / CSA B125.1
-  Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified

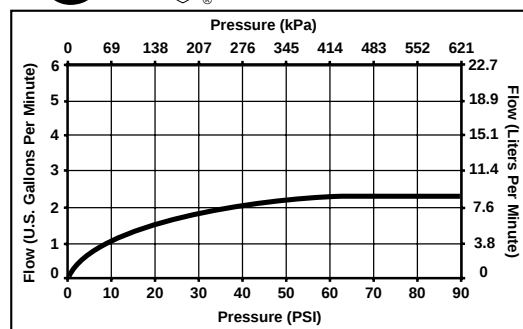

Available LHP Handle Options

▲Specify Finish

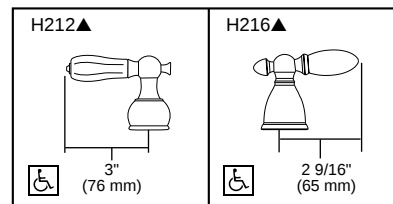

Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2006, Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book for finish options and product availability.

DSP-K-2255-LHP Rev. A